



Chemistry Lithium Manganese Dioxide

Designation IEC..... CR2025

Performance High Power

Cross Reference 2025

Nominal Voltage 3V

Typical Capacity 165 mAh

Service of Life 800 hours
*780 hours after 12 months of storage

Load 15 kOhm, at 20°C to 2 V

Open Circuit Voltage..... 3.20 ~ 3.40V

Temperatures Ranges Min Max

Storage 0°C 30°C

Discharge -20°C 60°C

Weight (Approx.) 2.7g


Dimensions ø20.0 x 2.5mm

Discharge of Life ≤ 2% / Year

Shelf life 10 Years (Standard Temperature 20±2°C)

Country of Origin China

Application Watch
Photo
Electronics

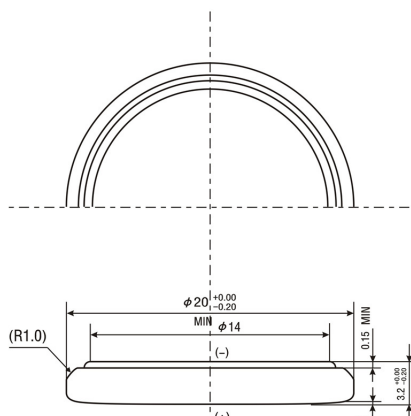

Discharge Characteristics; Discharge Load 15Kohm

