


VOLTAGE TESTER

NF-823



Display interface

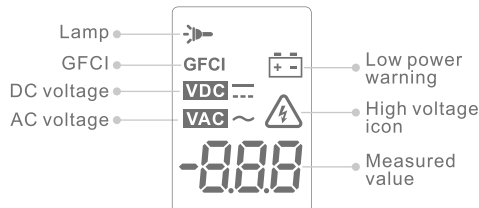

Product specification

1. Turn on/off

Long press "  " button to turn on or off.

2. AC/DC voltage

Short press "  " button to switch AC voltage/DC voltage, the default is DC voltage.

3. GFCI circuit breaker test

Connect the red probe to the live wire and the black probe to the ground wire, and short press the "  " button to trigger the GFCI output. A current of <30mA will be generated between the fire and ground, causing the leakage protection switch to operate, and whether the leakage protection switch is effective can be detected.

4. Backlight

After turn on, press the " " button to turn off/on the backlight.

5. Lamp

After turn on, press the " " button to turn off/on the lamp.

Specification

Product model	NF-823
AC voltage range	100mV~610V
DC voltage range	100mV~610V
GFCI	✓
Lamp	✓
Lower power warning	✓
Automatic off	Without operation for 15 minutes
Backlight off	Automatically off without operation for 5 minutes
Battery type	3A 1.5V(3pcs)
Work temperature	32~122°F(0~50°C)
Storage temperature	14~122°F(-10~50°C)
Work humidity	≤90% No condensation
Dimensions	155x53x37 mm

Packing list

Voltage tester	1 pc	User manual	1 pc
Tool bag	1 pc	Color box	1 pc
Probes	2 pc	Certificate	1 pc

Notes: The manual is for reference only. Changes may be made without notice. The actual product shall prevail.



深圳市诺方舟电子有限公司

编号	201	202	301	302	303	304	305	比例:	1:1	品号:	304-E2201-0002
类目	塑胶件	五金类	镜片	PVC贴纸	不干胶贴	说明书	包装盒	单位:	mm		
选择						√		设计	CZG	品名:	NF-823说明书折页英文-V1 20240509
306	307	308	309	310	311	312	313	核准			
彩卡	吸塑	工具包	PE袋	纸箱	宣传单	合格证	打印标签	标准:	√	文件类型:	做货文件
								定制:			
制作日期		2024.05.09		样式		2折页		印刷材质		128g双铜纸	
印刷要求		单色		页码		变更记录					
尺寸大小		160*120mm		版本							